

PVI Ramps

pviramps.com

**We are the
Difference.**

UTILITY



- separates into two pieces for easy carrying.
- folds in half, carries like a suitcase.
- patented center joint hinge eliminates pinch point and adds strength.
- durable welded fabrication.
- full 30" wide platform provides excellent stability.
- anti-slip, high traction surface.
- lightweight, easy to handle and set up.
- safety guide visual aid indicates if ramp is on a safe slope.
- extended hook to clear rear bumper, accommodates wheelchairs and scooters with various wheel configurations, safety video, steel security pins and safety strap included.



Prairie View Industries, Inc.


prairie view industries, inc. | ramp division | p.o. box 575 | fairbury, ne 68352-0575
phone 800-554-7267 | fax 402-729-4058 | email info@pviramps.com | www.pviramps.com



prairie view industries, inc.
RAMPS

access ramps

UTILITY

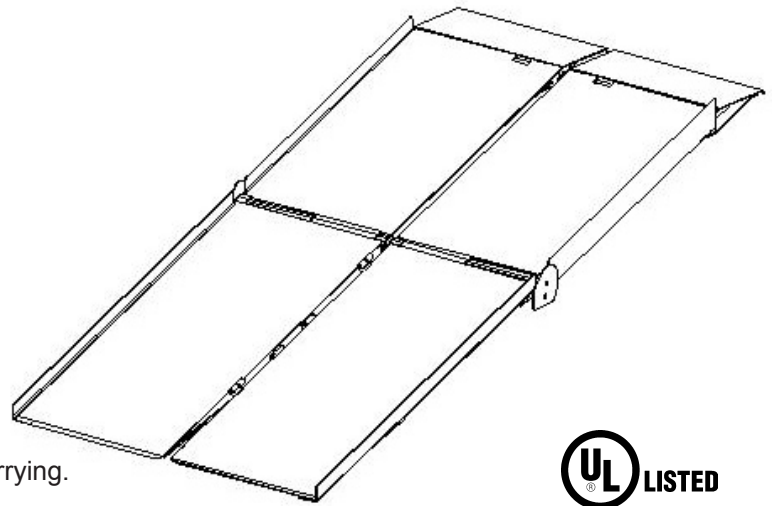

FEATURES

- separates into two pieces for easy carrying.
- folds in half, carries like a suitcase.
- patented center joint hinge eliminates pinch point and adds strength.
- durable welded fabrication.
- full 30" wide platform provides excellent stability.
- anti-slip, high traction surface.
- lightweight, easy to handle and set up.
- safety guide visual aid indicates if ramp is on a safe slope.
- extended hook to clear rear bumper, accommodates wheelchairs and scooters with various wheel configurations, safety video, steel security pins and safety strap included.

DETAILS AND SPECIFICATIONS

- accomodates wheelchairs and scooters with various wheel configurations.
- extended hook to clear rear bumper.
- safety video and steel security pins included and safety strap included.
- maximum ramp capacity: 300 lbs. one axle - 600 lbs. two axles, except on UTW1030: 250 lbs. one axle - 500 lbs. two axles.
- listed by Underwriters Laboratories, Inc.

UTILITY					
Item Number	Length (feet)	Width (inches)	Folded Size (inches)	Weight (lbs.)	Capacity* (lbs.)
UTW630	6	30	38 1/4 X 16 X 10 3/4	36	600
UTW730	7	30	44 1/4 X 16 X 10 3/4	41	600
UTW830	8	30	44 3/4 X 16 X 11	52	600
UTW1030	10	30	62 3/4 X 16 X 11	63	500
* Maximum ramp capacity: 300 lbs. one axle - 600 lbs. two axles, except on UTW1030: 250 lbs. one axle - 500 lbs. two axles.					

Item #:

Model #:

Project #:

Quantity #: