
HIGHLANDER II

VERTICAL PLATFORM LIFT



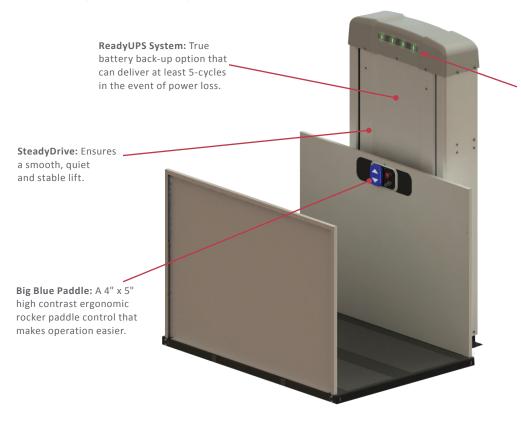

Guardian System: 4 bright, high-contrast LED status lights give continual performance feedback from the lift's control board. Monitoring almost every critical system, Guardian can provide immediate feedback and guidance.

MAXIMUM LIFTING HEIGHT

VPL400: up to 53" VPL600: up to 77" VPL800: up to 101" VPL1000: up to 125" VPL1200: up to 149" VPL1400: up to 171"

VPL400-1400 PRODUCT SPECIFICATIONS

CAPACITY	750 lb	SPEED	10.4 FPM
DRIVE	 ACME screw 90V ²/₃ HP fully sealed DC gear motor 	POWER	115V AC 15 AMP circuit breaker
PLATFORM SIZES	VPL400-VPL600: 36" x 48" clear platformVPL800-VPL1400: 36" x 54" clear platform	WARRANTY	3-year limited
CERTIFIED	 ETL listed CSA B44.1/ASME A17.5 Safety standard ASME A18.1 Rated commercial and residential 	FEATURES	 4" x 5" constant pressure paddle control Seal-Kor powder coat with stainless steel hardware for outdoor use
SAFETY FEATURES	 Safety pan beneath platform 4-LED indicators in top cap Emergency stop button in platform Overspeed brake Overload protection Interlocks for doors/gates Manual lowering tool 	OPTIONS	 Battery backup UPS system 36" or 42" platform gates with EMI interlock Grab bar in platform Fixed or auto-fold ramp Fire-rated doors Wired or wireless call/send controls Lighted E-Stop with alarm Key lock in platform 3-stop with 3-button control panel



